

Docket No.: 1509-432

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of :
HADDAD, Wassim :
New U.S. Patent Application :
Filed: July 30, 2003 :
For: BANDWIDTH ALLOCATION

CLAIM OF PRIORITY AND
TRANSMITTAL OF CERTIFIED PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

In accordance with the provisions of 35 U.S.C. 119, Applicant hereby claims the priority of British Patent Application No. 0217806.9, filed July 31, 2002 in the present application. The certified copy is submitted herewith.

Respectfully submitted,

LOWE HAUPTMAN GILMAN & BERNER, LLP



Randy A. Noranbrock
Registration No. 42,940

1700 Diagonal Road, Suite 310
Alexandria, Virginia 22314
(703) 684-1111 RAN/gmj
Facsimile: (703) 518-5499
Date: July 30, 2003



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

10 JUL 2003

Patent Act 1977
(Rule 1)

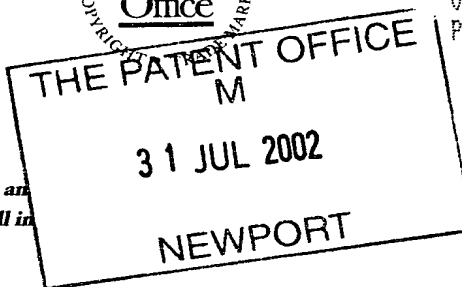

01AUG02 E737695-1 001463
P01/7700 0.00-0217806.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 30019896-1 GB

2. Patent application number 31 JUL 2002 0217806.9
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames) Hewlett-Packard Company
3000 Hanover Street
Palo Alto
CA 94304, USA

Patents ADP number (if you know it) 00496588001
Delaware, USA

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention Bandwidth Allocation

5. Name of your agent (if you have one) Richard A. Lawrence
Hewlett-Packard Ltd, IP Section
Filton Road, Stoke Gifford
Bristol BS34 8QZ
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it) 07448038001

| 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number | Country | Priority application number (if you know it) | Date of filing (day / month / year) |
|--|---------|--|-------------------------------------|
| | | | |

| 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application | Number of earlier application | Date of filing (day / month / year) |
|---|-------------------------------|-------------------------------------|
| | | |

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

| | | |
|-------------|-------|----|
| Description | 5 | CF |
| Claim(s) | 2 | |
| Abstract | 1 | |
| Drawing(s) | 1 + 1 | |

10. If you are also filing any of the following, state how many against each item.

| | |
|---|-----------|
| Priority documents | - |
| Translations of priority documents | - |
| Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>) | 1 |
| Request for preliminary examination and search (<i>Patents Form 9/77</i>) | 1 |
| Request for substantive examination (<i>Patents Form 10/77</i>) | - |
| Any other documents (please specify) | Fee Sheet |

11.

I/We request the grant of a patent on the basis of this application.

Signature

Richard A. Lawrence

Date

30/7/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Meg Joyce Tel: 0117-312-9068

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Bandwidth Allocation

This invention relates to a method of, and apparatus for, allocating bandwidth, and in particular to a method of, and apparatus for, adaptive bandwidth allocation in a 802.11b wireless local area network (LAN).

5

In a communications system, such as one operating using 802.11b wireless technology, a hot spot is an area of high bandwidth connectivity, that is to say an area in which high bandwidth connections can be made.

- 10 The aim of the invention is to provide a method of, and apparatus for, monitoring and managing the deployment of a wireless LAN, particularly in a hot spot.

The present invention provides a method of allocating bandwidths in a wireless LAN having a plurality of access points each using the same wireless technology for data
15 communication with users, the method comprising the steps of:-

- a) monitoring bandwidth usage by each of the access points; and
 - b) re-allocating bandwidth from a low bandwidth usage access point to a high bandwidth usage access point.
- 20 Preferably, the access points each use the 802.11b wireless technology.

In a preferred embodiment, the 802.11b wireless technology uses direct-sequence spread spectrum radio (DSSS). In this case, step b) may be such as to re-allocate a first sub-bandwidth of DSSS associated with the low bandwidth usage access point to
25 complement a second sub-bandwidth of DSSS associated with the high bandwidth usage access point, and the method further comprises the step of expanding the coverage of a third access point using the third sub-bandwidth of DSSS for data communication with the users of the access point previously operating under the first sub-bandwidth of DSSS.

30

Alternatively, the 802.11b wireless technology operates under frequency-hopping spread spectrum radio (FHSS). In this case, step b) may be such as to re-allocate at least one FHSS bandwidth channel from the low bandwidth usage access point to the high bandwidth usage access point.

5

The invention also provides a wireless LAN constituted by a plurality of access points each using the same wireless technology for data communication with users, wherein the LAN is provided with means for monitoring bandwidth usage by each of the access points, and for re-allocating bandwidth from a low bandwidth usage access point to a high bandwidth usage access point.

10

The invention will now be described in greater detail, by way of example, with reference to the drawings, in which:-

Figure 1 is a schematic representation of a hot spot which utilises DSSS technology; and

15

Figure 2 is a schematic representation of a hot spot using FHSS technology.

Referring to the drawings, Figure 1 shows a hot spot having four access points A, B, C and D, the ranges of the access points being indicated by the circles A', B', C' and D'. The access points A to D use the 802.11b wireless technology and operate under DSSS. In DSSS, a data signal at the sending station is combined with a higher data rate bit sequence, or chipping code, that divides the user data according to a spreading ratio. The chipping code is a redundant bit pattern for each bit that is transmitted, which increases the signal's resistance to interference. If one or more bits in the pattern are damaged during transmission, the original data can be recovered as a result of the redundancy of the transmission. A DSSS system spreads the power of the 2.4GHz frequency band using mathematical coding functions. In practice, DSSS splits the total bandwidth of 802.11b into three equal sub-bandwidth channels.

20

25

In the hot spot of Figure 1, each of the access points A, B and C is allocated one of the three sub-bandwidth channels, for example, the access point A may be allocated the first sub-bandwidth channel, the access point B the second sub-bandwidth channel and

30

the access point C the third sub-bandwidth channel. The user within range of each of the access points A, B and C will, therefore, communicate with the relevant access points over the respective sub-bandwidth channel. Where the ranges of adjacent access points A, B and C overlap, users can communicate with one or more of the access points. Users within range of the access point D also communicate with that access point using the first sub-bandwidth channel rather than the second or third sub-bandwidth channel. This is because, as shown, the range of access point D overlaps the ranges of access points B and C, but does not overlap the range of the access point A. Consequently, there is no danger of interference from access point A for users within range of the access point D.

The hot spot is controlled by a control means associated either with one of the access points A to D separately (as indicated by the reference M). The control means M is preferably associated with a server S, to which the access points A to D are connected, conveniently by hard wiring. The control means M continuously monitors the consumption of the bandwidth channels in all areas, and will increase or decrease it in one or more areas in dependence on the number of users within those areas. For example, if the number of users within range of access point A increases substantially, and the number of users within range of the access point B reduces substantially, the second sub-bandwidth channel would be re-allocated to the access point A, and the access point C would be reconfigured by expanding its range to cover the users previously within range of the access point B.

As a DSSS system spreads the power out over a wider frequency band using mathematical coding functions, the widespread signal is correlated into a stronger signal at a receiver, so that any narrow band noise is spread widely. Thus, a system operating under DSSS is susceptible to interference to, for example, noise from microwaves. DSSS has, however, the advantage of a high throughput, and hence a high quality of service, (QoS).

30

The arrangement described above with reference to Figure 1 could be modified, for example by adding a fifth access point E (shown in dotted lines). This access point

would operate using the second sub-bandwidth channel, as access points C and D use the first and third sub-bandwidth channels.

Figure 2 is a schematic representation of a hot spot similar to that shown in Figure 1, the hot spot having three access points X, Y and Z whose ranges are indicated by the lines X', Y' and Z'. In this case, each of the access points operates using 802.11b technology operating under FHSS. This is a technique that uses a time-varying narrow band signal to spread the radio frequency (RF) energy over a wide band. In practice, FHSS divides the 802.11b bandwidth into a large number of smaller bandwidth channels, and the system works by jumping from one frequency (bandwidth channel) to another in a random pattern, a short burst of data being transmitted at each of the frequencies. The technique reduces interference because a signal from a narrowband system will only affect the spread spectrum signal if both are transmitting at the same frequency at the same time. If transmitter and receiver are synchronised properly, a single logical channel is maintained. The transmission frequencies are determined by a spreading, or hopping, code – the receiver must be set to the same hopping code and must listen to the incoming signal at the right time and correct frequency in order to receive the signal properly.

In the hot spot of Figure 2, the access point X may be allocated four FHSS bandwidth channels f1 to f4, the access point Y may be allocated four bandwidth channels f5 to f8, and the access point Z may be allocated four bandwidth channels f9 to f12. In practice, each of the access points X, Y and Z would be allocated more bandwidth channels, but this system will be described as using only twelve channels for the sake of simplicity.

The hot spot is controlled by control means associated with one of the access points X - Z or separately (as indicated by the reference N). The control means N is preferably associated with a server T, to which the access points X, Y and Z are connected, conveniently by hard wiring. The control means N continuously monitors the consumption of the bandwidth channels in all areas, and will increase or decrease it in one or more areas in dependence on the numbers of users within those areas. For example, if the number of users within range of the access point X increases

substantially, and the number of users within the range of the access point Y reduces substantially, the control means N will re-allocate one or more of the bandwidth channels associated with that access point to the access point X. For example, bandwidth channels f7 and f8 may be re-allocated to the access point X. It should be
5 noted that bandwidth channels adjacent to those associated with the access point X should not be re-allocated, as they are more likely to cause interference with the bandwidth channels already being deployed by the access point X. If further bandwidth is required in the area covered by the access point X, this could be accomplished by re-allocating, for example, bandwidth channels f9 and f10 from the access point Z.

10

The system described above with reference to Figure 2 has advantages over that described with reference to Figure 1 in that it gives greater flexibility, it being possible to allocate extra bandwidth in small, discrete amounts than the DSSS system. The FHSS system of Figure 2 also suffers less from problems with noise, but it does have
15 the disadvantage of having a smaller throughput and reduced QoS when compared with the DSSS system of Figure 1. The choice of which system (DSSS or FHSS) to use is, therefore, dependent upon the requirements for throughput, QoS, flexibility and noise.

Claims

1. A method of allocating bandwidths in a wireless local area network (LAN) having a plurality of access points each using the same wireless technology for data communication with users, the method comprising the steps of:-
 - a) monitoring bandwidth usage by each of the access points; and
 - b) re-allocating bandwidth from a low bandwidth usage access point to a high bandwidth usage access point.
2. A method as claimed in claim 1, wherein the access points each use the 802.11b wireless technology.
3. A method as claimed in claim 2, wherein the 802.11b wireless technology uses direct-sequence spread spectrum (DSSS) transmission.
4. A method as claimed in claim 3, wherein step b) is such as to re-allocate a first sub-bandwidth of DSSS associated with the low bandwidth usage access point to complement a second sub-bandwidth of DSSS associated with the high bandwidth usage access point, and the method further comprises the step of expanding the coverage of a third access point using the third sub-bandwidth of DSSS for data communication with the users of the access point previously operating under the first sub-bandwidth of DSSS.
5. A method as claimed in claim 2, wherein the 802.11b wireless technology operates under frequency-hopping spread spectrum (FHSS).
6. A method as claimed in claim 5, wherein step b) is such as to re-allocate at least one FHSS bandwidth channel from the low bandwidth usage access point to the high bandwidth usage access point.
7. A wireless local area network (LAN) constituted by a plurality of access points each using the same wireless technology for data communication with users, wherein

the LAN is provided with means for monitoring bandwidth usage by each of the access points, and for re-allocating bandwidth from a low bandwidth usage access point to a high bandwidth usage access point.

5 8. A LAN as claimed in claim 7, wherein the access points each use the 802.11b wireless technology.

9. A LAN as claimed in claim 8, wherein the 802.11b wireless technology uses direct-sequence spread spectrum (DSSS).

10

10. A LAN as claimed in claim 9, wherein the monitoring and re-allocation means is such as to re-allocate a first sub-bandwidth of DSSS associated with the low bandwidth usage access point to complement a second sub-bandwidth of DSSS associated with the high bandwidth usage access point, and said means is such as to
15 expand the coverage of a third access point using the third sub-bandwidth of DSSS for data communication with the users of the access point previously operating under the first sub-bandwidth of DSSS.

11. A LAN as claimed in claim 8, wherein the 802.11b wireless technology
20 operates under frequency-hopping spread spectrum (FHSS).

12. A LAN as claimed in claim 11, wherein the monitoring and re-allocation means is such as to re-allocate at least one FHSS bandwidth channel from the low bandwidth usage access point to the high bandwidth usage access point.

Bandwidth Allocation**Abstract**

5 A method is provided of allocating bandwidths in a wireless local area network having a plurality of access points (A to D) each using the same wireless technology for data communication with users. The method comprises monitoring bandwidth usage by each of the access points, and re-allocating bandwidth from a low bandwidth usage access point to a high bandwidth usage access point.

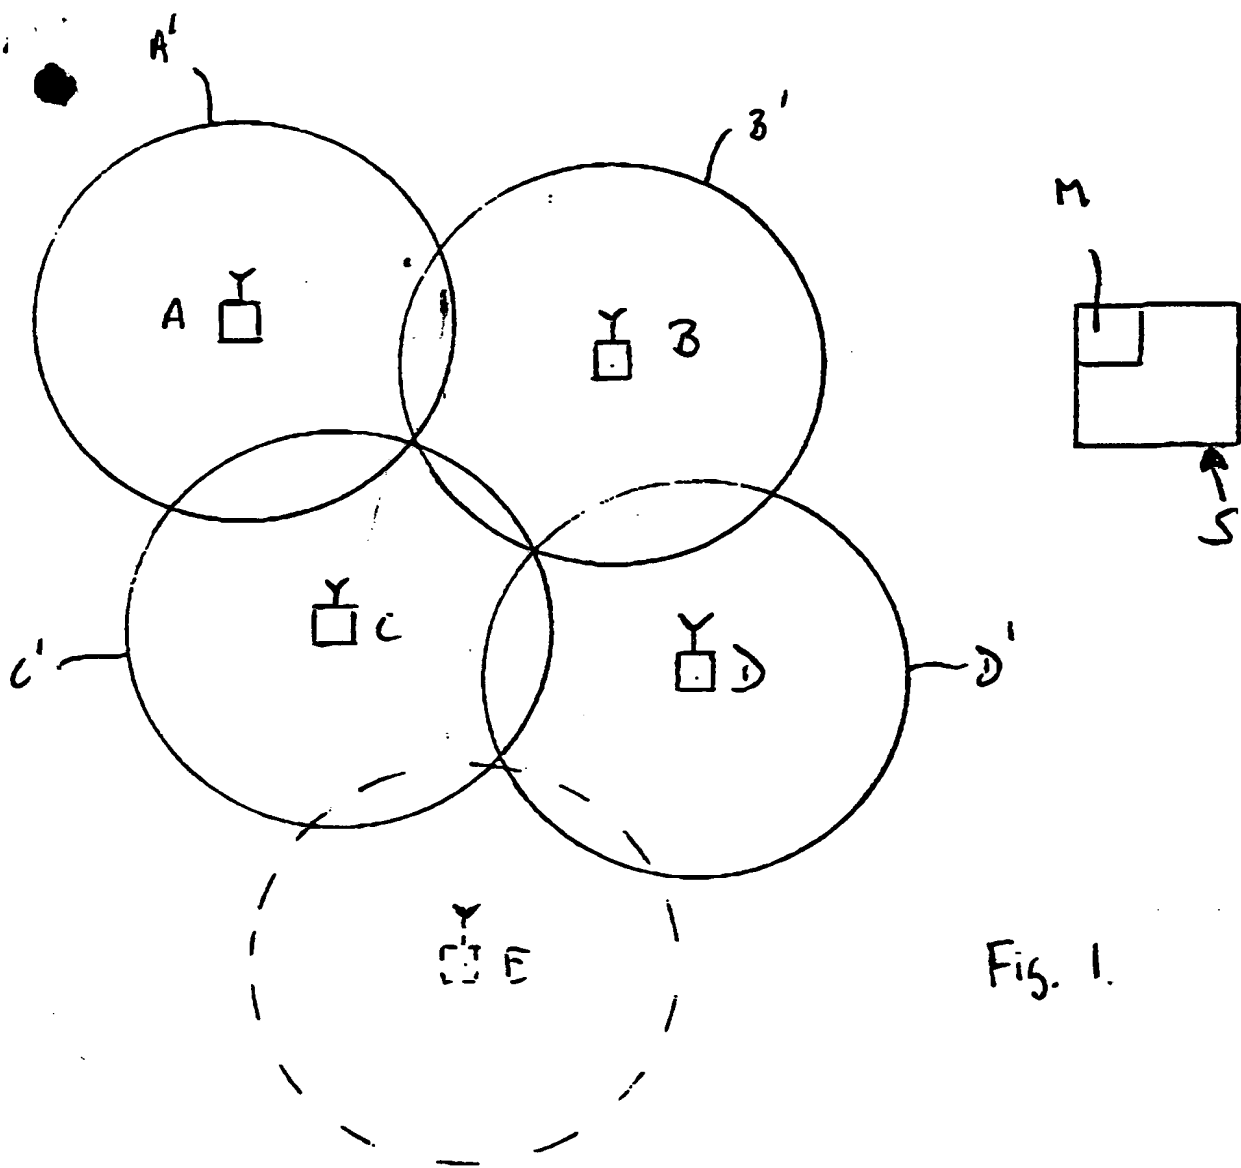


Fig. 1.

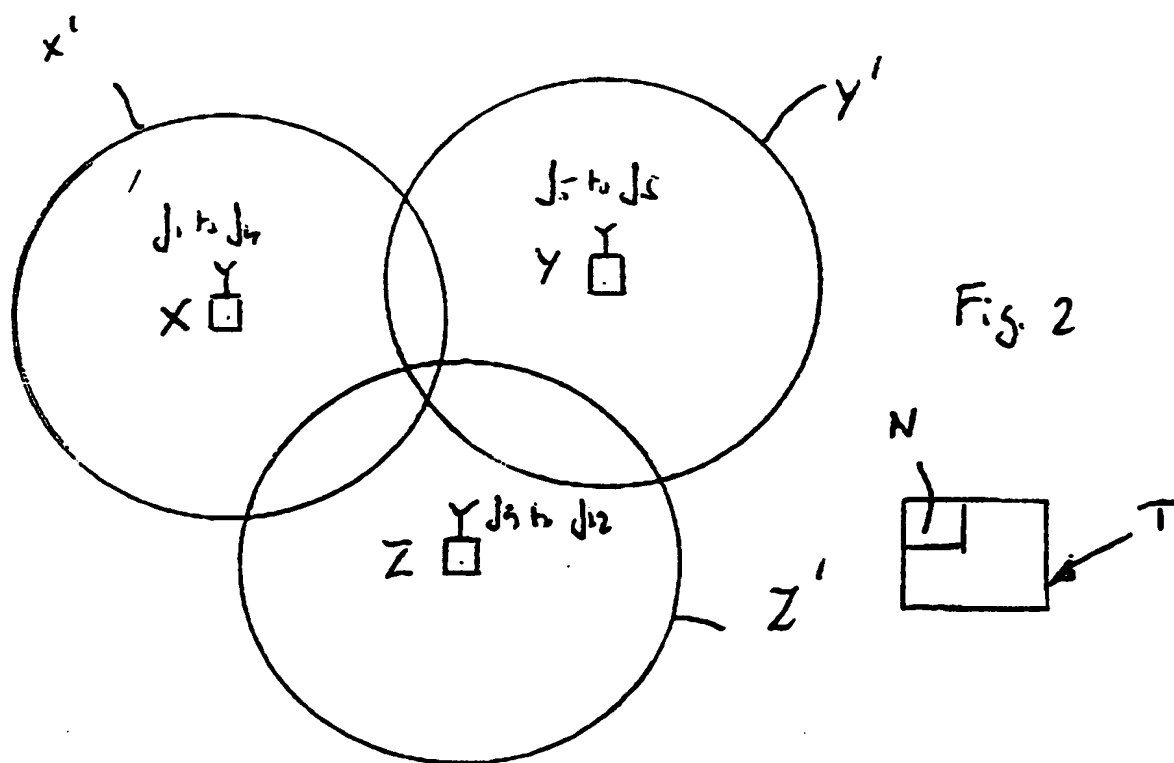


Fig. 2

